


R211 Series

Access Control Reader

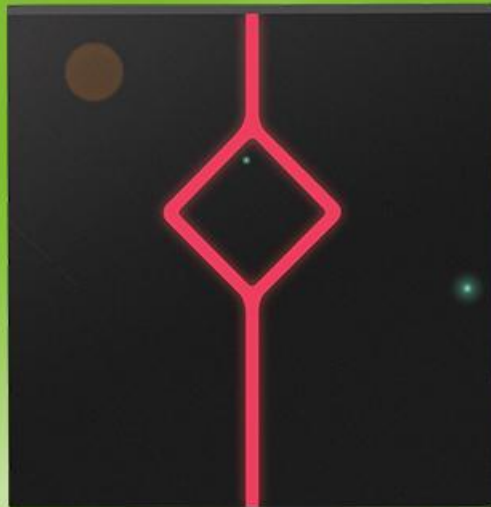

Overview

R211 series is a buttonless contactless RF access control card reader. The container adopts Chinese style design and incorporates the modern minimalist deformation pattern of Chinese knots, which is suitable for both antique Chinese architectural design and modern architectural environment with minimalist style. It is suitable for access control, visitor management, entry and exit gates, and unmanned supermarkets, building automation, elevator control and other fields.

The card reader has its own configuration card configuration function, which supports flexible configuration of various parameters of the card reader through the configuration card, such as card key, card number output format, Wiegand mode, which makes the card reader very convenient to meet various personalized Customer demand, improve service efficiency.

Models

Model	Description
R211E	Support Weigand interface Support get physical card number of ID thick card, ID thin card, ID key-chain card
R211M	Support Weigand interface, support protocol ISO/IEC14443A/B 1、 Support get physical card number of S50/S70/desfire/NTAG213/NTAG216/ultrlight/FM1204/FM1208 2、 Support get physical card number of Chinese Identity card

Features

- ◇ Support Wiegand output;
- ◇ The interior is poured with epoxy resin, and it is designed with IP67 waterproof;
- ◇ Unique Chinese style design, the card reader light strip symbolizes the Chinese knot;
- ◇ Anti-static protection design;
- ◇ Support swipe configuration card to configure the reader.

Specifications

Params	Description
Frequency	13.56MHz、125KHz
Working voltage	DC 12V (±5%)
Working current	≤200mA
static current	≤150mA
Card type	IC or ID (Mifare S50、S70、CPU etc.)
Weigand format	Optional W26 or W34
Sensing distance	0-3CM (depends on card type and work environment)
Working humidity	20%-80%
Working temperature	-20℃~+65℃
Storage temperature	-20℃~+80℃
Output short circuit protection	≤100μs
Wiring Definition	Red(VCC) Black(GND) White(D1) Green(D0) Purple(Beer) Gray(CLED) Yellow(output WG26 connect to GND)
size	90*90*16mm(tolerance±0.2)

TEL: +86-0755-29062099-8018

For more contact methods and product information, please visit our website: www.zkradio.com

Note: The pictures and content above are for reference only. Due to the updating of products,ZKRadio will not be responsible for any disputes caused by the discrepancy between the actual and the specifications. The copyright belongs to ZKRadio Electronic Technology Co., Ltd.



Public WeChat



website